# NATURAL 12 Bar 20in STR-PTS 120V

# GRADE 304 Stainless Steel

Model/SKU: NAT12121-PTS-####\* ("where #### is the relevant finish code)

### **HTR Technical Specifications:**

**Size:** 20%<sub>16</sub>" (width) x 485%" (height) **Power:** 150 Watts **Current:** 1.25 Amps **Volts:** 120 VAC **IP Rating:** IPX5

# Controller Fitted: PTSelect Switch (PTS)

#### **Controller Features:**


• Temperature Adjustment • ON / OFF Switch • RED LED Indicator

## **Controller Technical Specifications:**

INPUT Voltage Range: 190VAC~250VAC Operating Frequency: 60 Hz ±2% Load Capability: 0.18A~4A Load Control Range: 40~100% Standby Current: 3.0mA

Suggested Height of Electrical Outlet = 750mm /  $291/_2$ " (this is only an indication as every installation is different)

NOTES: \*EO Denotes DUAL ENTRY Electrical Outlet connection \*PTS Denotes location of PTSelect Switch

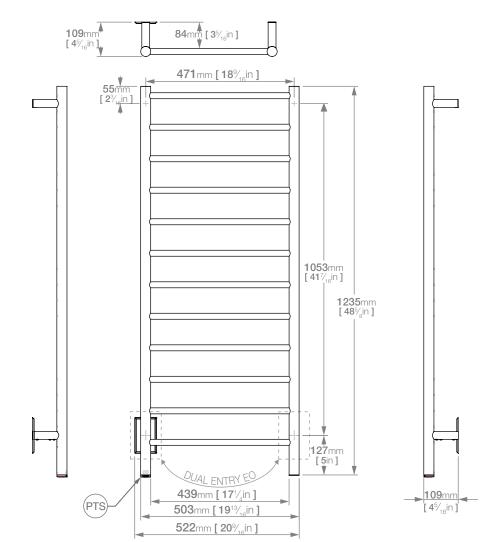

Copyright Bathroom Butler® 2023

Dimensions given are in mm. Bathroom Butler® reserves the right to alter and/or remove designs from time to time without prior notice. This drawing is to be used for reference purposes only. E &O.E.



USA: 631.464.2851 • customercare@bathroombutler.com • www.bathroombutler.com/us South Africa: 0860 104 653 • info@bathroombutler.co.za • www.bathroombutler.com/za Australia: +61 436 487 420 • info\_aus@bathroombutler.com • www.bathroombutler.com/au Mauritius: 230 242 1248 • sales@lisinggroup.com • www.bathroombutler.com

#### SSSSS S 15 DET $\checkmark$ RAPID PERSONAL DRY ELEMENT GRADE 304 YEAR LIMITED HEATING 10-15min TEMPERATURE TECHNOLOGY DUAL ENTRY TAINLESS STEE GUARANTEE SELECT Intertek 4001410

Document version **033** Product version **030**